



REV.	DESCRIPTION	DATE
A		
B		02-2006

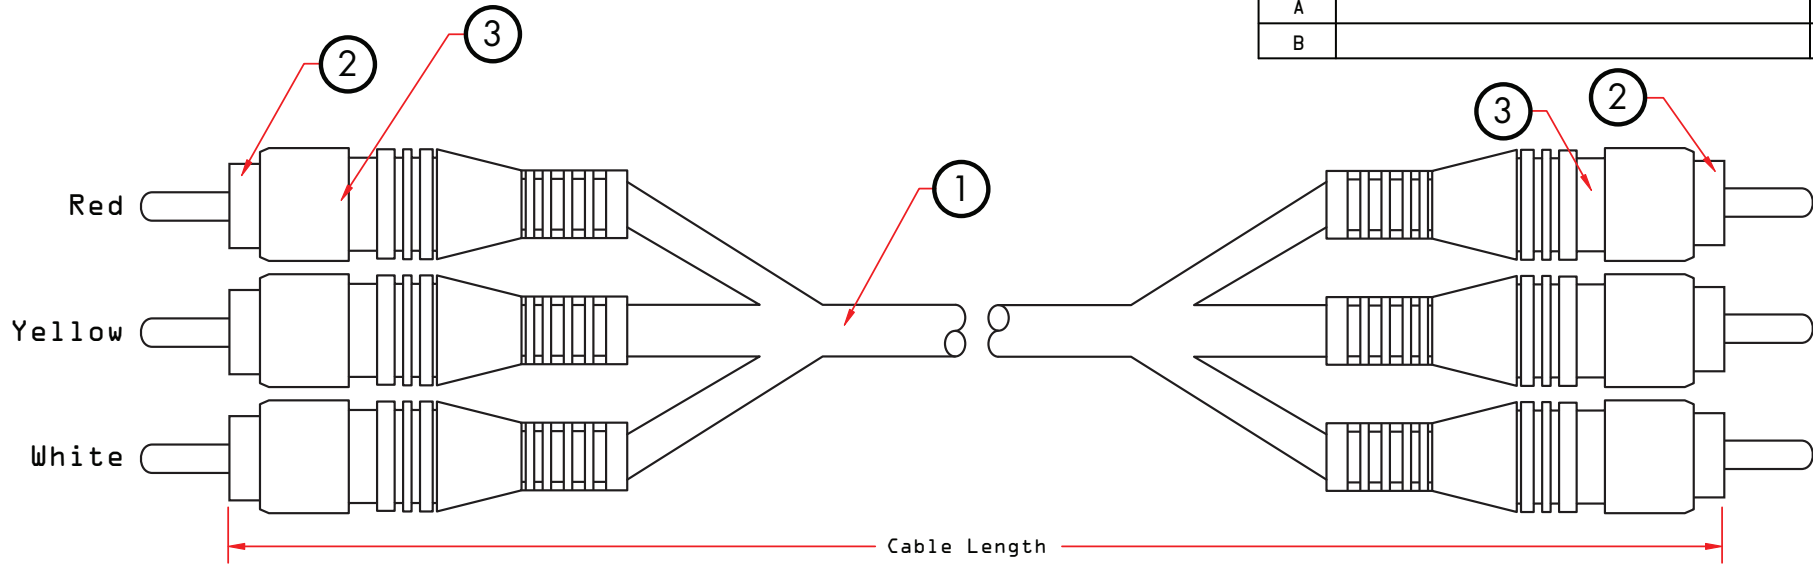


Audio Cable Specifications:

6.0 mm OD Spiral-Shielded Cable
 AWG26 (10 x 0.12mm) Bare Copper Center Conductor
 48 x 0.12mm Bare Copper Spiral-Shield (95% coverage)
 1.8mm OD PVC Insulator
 6.0mm OD Rubberized-Flex PVC Jacket

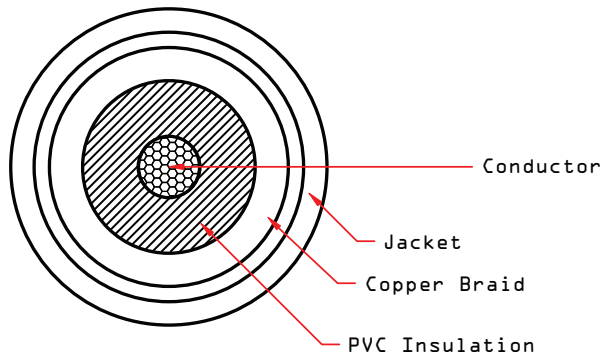

Video Cable Specifications:

RG59 75 Ohm Coaxial Cable
 AWG22 0.65mm Solid Copper Center Conductor
 0.025mm Aluminum Foil Shield
 112 x 0.16mm Bare Copper Braided Shield (95% coverage)
 3.7mm OD LDPE Dielectric
 5.8mm OD Rubberized-Flex PVC Jacket

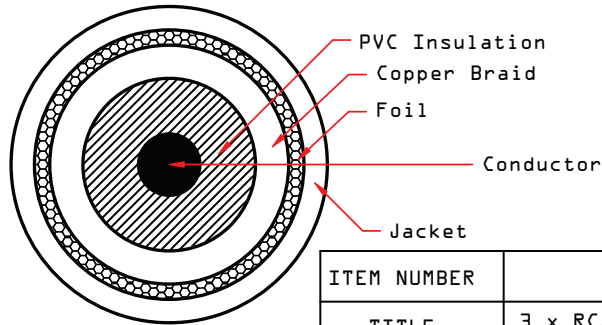

PART NO.	CABLE LENGTH
10R2-03103	3 ft
10R2-03106	6 ft
10R2-03112	12 ft
10R2-03125	25 ft
10R2-03135	35 ft
10R2-03150	50 ft

3	Molded PVC Hood
2	RCA Male Nickel Plated
1	Video - AWG22 0.65mm Solid Copper Conductor, Audio - AWG26 (10 x 0.12mm) Bare Copper Center Conductor, Rubberized-Flex PVC Jacket
NO.	SPECIFICATIONS

BOM LIST

ITEM NUMBER	10R2-031xx	DRAWER	MPD
TITLE	3 x RCA Male to 3 x RCA Male, (Red, White, Yellow) Audio / Video Cable	CHECKED	MAC
MATERIAL		APPROVED	MAC
REV.	A	SCALE	INCH
DRAWING NO:		UNIT	

