



REV.	DESCRIPTION	DATE
A		
B		04-2008

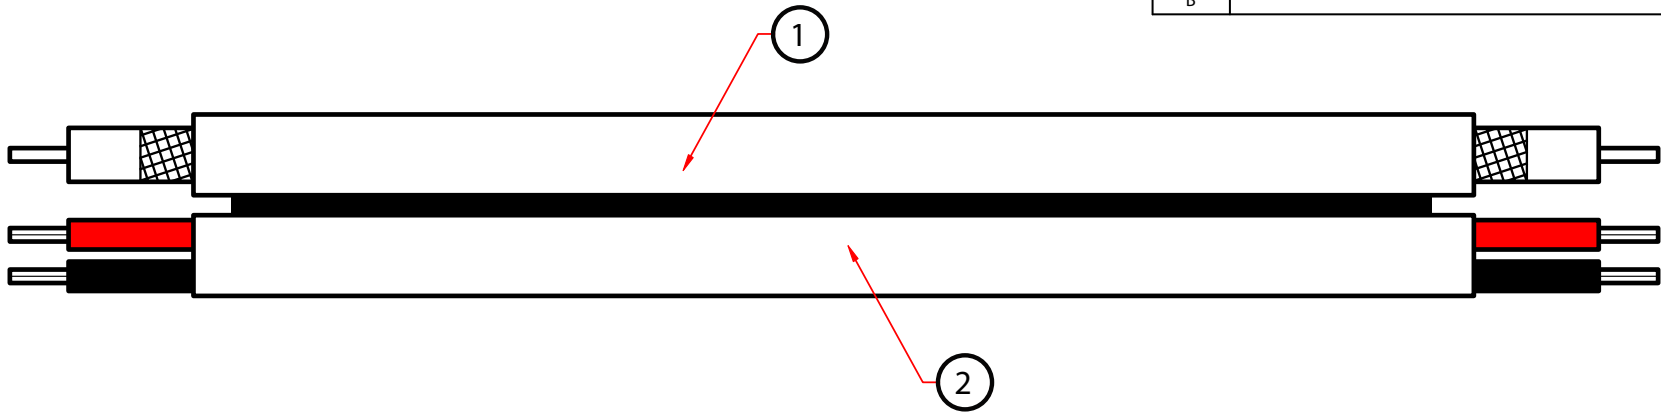


### Coax Cable Specifications:

RG59 75 Ohm Coaxial Cable  
 20AWG 0.82mm Solid Bare Copper Center Conductor  
 16/7/0.16mm CCA Braid (95% Coverage)  
 3.66mm OD PE Dielectric  
 6.1mm OD Black PVC Jacket

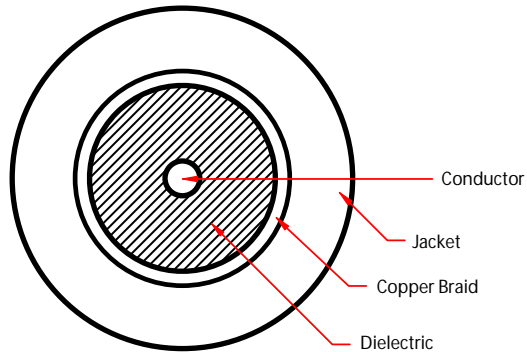

### Power Cable Specifications:

2 x 18AWG Stranded Bare Copper Center Conductor  
 Black and Red PVC Conductor Jackets  
 Insulation OD: 2.8+/-0.2mm  
 CM, 30V, 70C

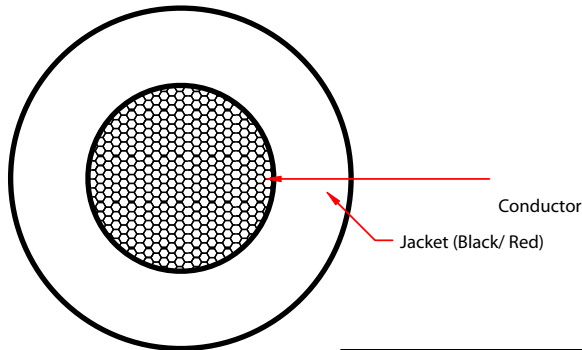

PART NO.	CABLE LENGTH
10X3-18222NF	500 ft
10X3-18222NH	1000 ft

ITEM NUMBER	10X3-18222Nx		DRAWER	MPD
TITLE	RG59 Siamese Solid Coaxial Cable + 18/2 (18AWG 2C) Power, Black, Spool		CHECKED	MAC
MATERIAL	SCALE		APPROVED	MAC
REV.	A	UNIT	INCH	

2	18AWG Bare Stranded Copper Center Conductor, Insulation OD: 2.8+/-0.2mm, CM, 30V, 70C, Black and Red PVC Jackets
1	RG59 Cable, CM, 75Ohm with 95% CCA Braided Shield, Black Outer PVC Jacket.
NO.	SPECIFICATIONS
	BOM LIST

