


REV.	DESCRIPTION	DATE
A		
B		02-2010

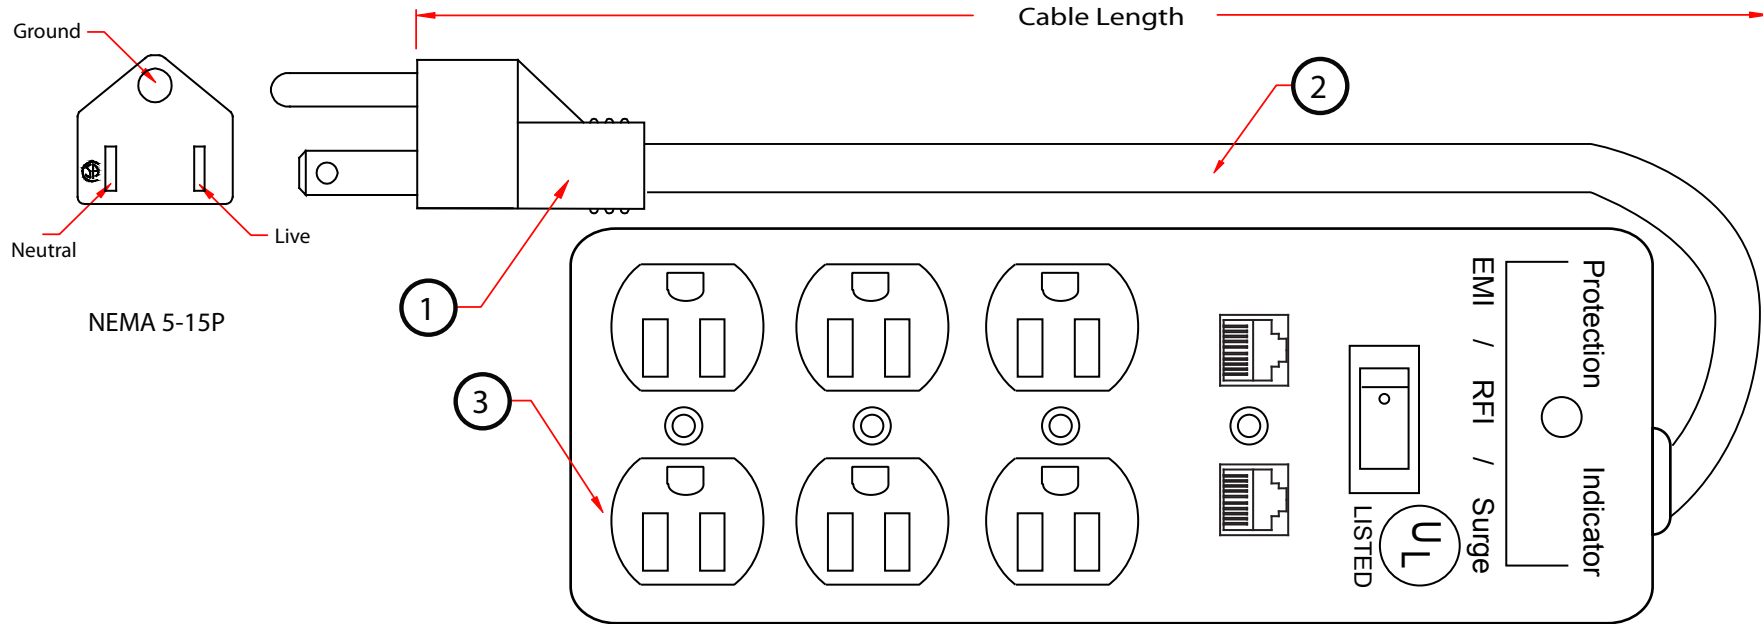

**Specifications:**  
 Electrical Rating -----125 VAC, 15 Amps, ( 1,800 Watts)  
 Out lets----- 6  
 Maximum Surge Voltage -----6KV  
 Maximum Surge Dissipation -----1080 joules  
 Max Spike Current -----72000 Amps  
 UL Clamping Voltage ----- 400 Volts  
 Clamping Response Time -----Less than 1 nanosecond  
 Temperature Range ----- -40 C to +80 C  
**MODEM PROTECTION SPECIFICATIONS:**  
 Outlets ----- 2RJ11 Jacks  
 Maximum surge Dissipation -----160 Joules  
 Max Spike Current -----10500 Amps  
 Clamping Voltage ----- 400 Volts  
 Clamping Response Time -----Less than 1 nonsecond

RoHS

PART NO.	CABLE LENGTH
51W1-04206	6 ft
51W1-04210	10 ft
51W1-04215	15 ft
51W1-04225	25 ft

ITEM NUMBER	51W1-082xx			DRAWER	LIBRA
TITLE	Surge Protector, 6 Outlet, 3 MOV, EMI & RFI with Modem Protector			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com	

3	6 Outlet Strip w/ Modem Protector, Color: White
2	UL/CSA Approved NEMA 5-15P, Color: White
1	UL/CSA Approved SJT 14AWG X 3C, 105C, Lead-Free, Color: White
NO.	SPECIFICATIONS
	BOM LIST